



D313

— ELECTRICAL AND  
VIBRATING WIRE  
**CRACKMETERS**

EXTENSOMETERS  
& JOINTMETERS



## ELECTRICAL AND VIBRATING WIRE CRACKMETERS



Crackmeters are intended to monitor movements across surface joints or cracks, mainly in concrete structures or rocks.

Crackmeter consists of a vibrating wire or potentiometer displacement transducer housed in a stainless steel telescopic body with two anchoring points.

These anchors have self-lubricating ball joints allowing lateral movements up to  $\pm 10^\circ$  in the orthogonal planes (Y - Z axis) not influencing the operation of the jointmeter.

### APPLICATIONS

- Cracks on concrete structures or rock
- Structural joints like in concrete dams
- Displacements on pile bearing
- Monitoring of rock faults

### FEATURES

- 3-D mounting kit available for triaxial displacement monitoring
- Ball joints allow small lateral movement
- Waterproof up to 100 kPa
- Suitable for long term monitoring


**CE** Meet the essential requirements of the EMC Directive 2004/108/EC

## VIBRATING WIRE CRACKMETERS

MODEL	0D313S010VW	0D313S025VW	0D313S050VW	0D313S100VW	0D313S150VW
Technology	vibrating wire with built-in thermistor				
Range	0 - 10 mm	0 - 25 mm	0 - 50 mm	0 - 100 mm	0 - 150 mm
Total accuracy <sup>(1)</sup>	< ±0.50% FS	< ±0.50% FS	< ±0.30% FS	< ±0.30% FS	< ±0.30% FS
Output signal	frequency (VW), resistance (T)				
Typical frequency range <sup>(2)</sup>	2250 - 3000 Hz				
Power supply	-				
Operating temperature	-20°C +80°C				
Anchors type	expanding shell anchor Ø 14 mm, 55 mm long				
Length (compressed)	296 mm	303 mm	469 mm	500 mm	631 mm
Length (extended)	306 mm	328 mm	519 mm	600 mm	781 mm
Material	stainless steel	stainless steel	stainless steel	stainless steel	stainless steel
Weight	0.5 kg	0.5 kg	0.6 kg	0.7 kg	0.8 kg
Protection	IP68 up to 1.0 MPa				
Signal cable	0WE104K00ZH				
Max. distance to datalogger <sup>(3)</sup>	1000 m (for more information see <a href="#">FAQ#77</a> )				

(1) Including linearity, hysteresis and repeatability (2) The expressed frequency range could have a ±10% variation (3) Refer to FAQ section of Sisgeo website: [www.sisgeo.com/faq](http://www.sisgeo.com/faq)

## PHYSICAL FEATURES

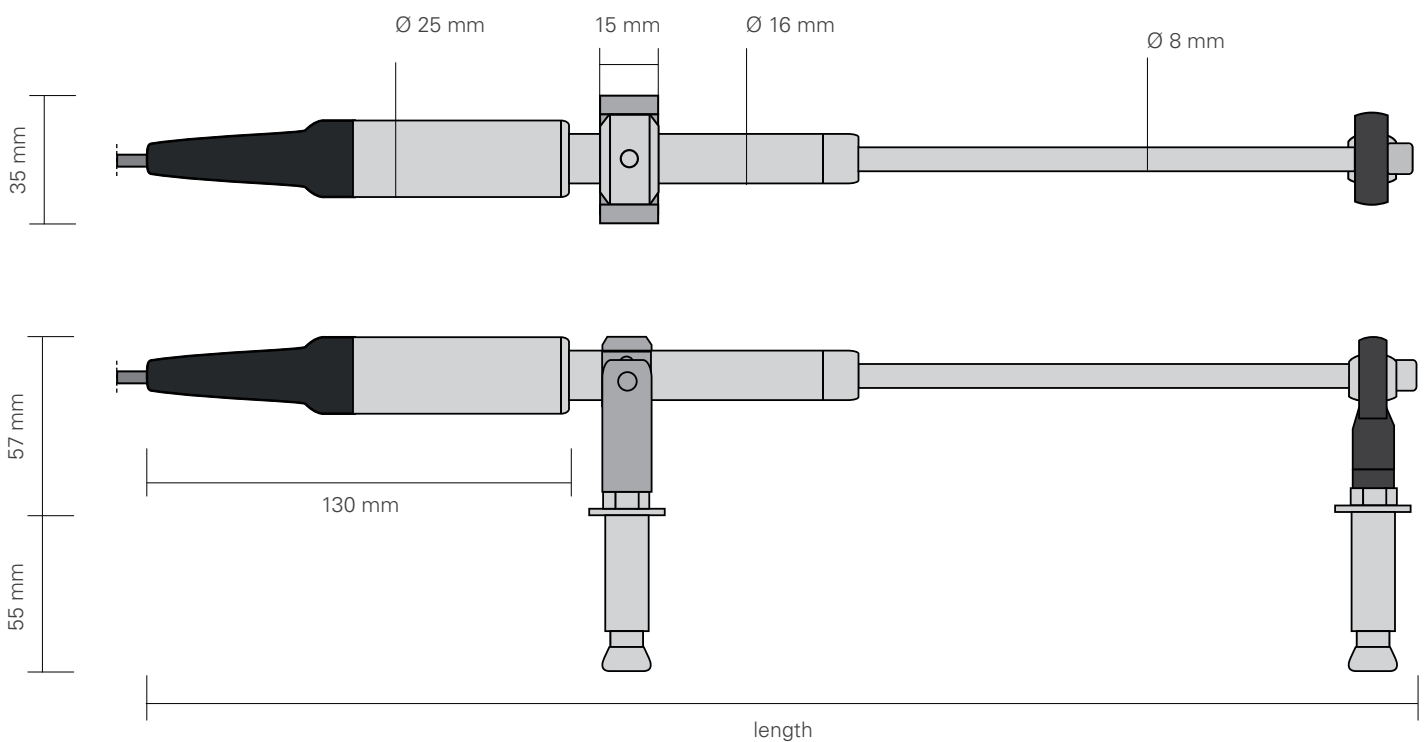


## ELECTRICAL CRACKMETERS

MODEL	0D313SA1000	0D313SA2500	0D313SA5000	0D313SAE100	0D313SAE500	0D313SAE200
Technology	linear potentiometer					
Range	10 mm	25 mm	50 mm	100 mm	150 mm	200 mm
Total accuracy <sup>(1)</sup>	< ±0.30% FS	< ±0.30% FS	< ±0.20% FS	< ±0.20% FS	< ±0.15% FS	< ±0.15% FS
Output signal	4-20 mA current loop (voltage on request)					
Power supply	12 - 24 V DC					
Operating temp.	-20°C +60°C					
Anchors type	expanding shell anchor Ø 14 mm, 55 mm long					
Length (compressed)	334 mm	334 mm	384 mm	484 mm	584 mm	684 mm
Length (extended)	344 mm	359 mm	434 mm	584 mm	734 mm	884 mm
Material	stainless steel	stainless steel	stainless steel	stainless steel	stainless steel	stainless steel
Weight	0.5 kg	0.5 kg	0.6 kg	0.7 kg	0.8 kg	0.9 kg
Signal cable	0WE102KEOZH					
Max. distance to datalogger <sup>(2)</sup>	1000 m (for more information see <a href="#">FAQ#77</a> )					

(1) Including linearity, hysteresis and repeatability (2) Refer to FAQ section of Sisgeo website: [www.sisgeo.com/faq](http://www.sisgeo.com/faq)

## PHYSICAL FEATURES

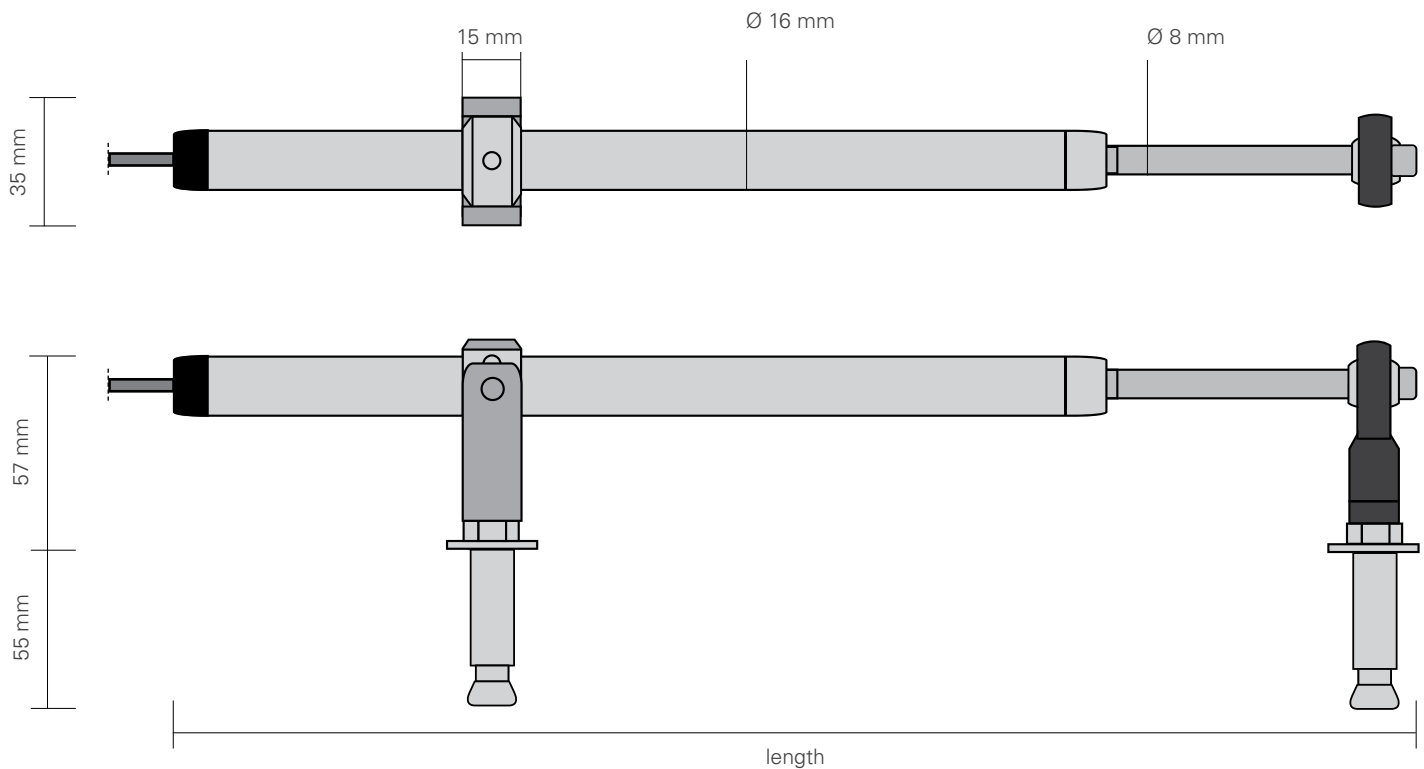

## ACCESSORIES AND SPARE PARTS

### Y-AXIS FIXING KIT OD31Y1DTE00

Y-axis fixing kit is composed by a stainless steel "L" shaped plate (50x50x150 mm) supplied with screws, nuts and expanding shell anchors, allowing jointmeter installation in Y direction.

### Z-AXIS FIXING KIT OD31Z1DTE00

Z-axis fixing kit is composed by two stainless steel "L" shaped plates (50x60x200 mm and 50x50x65 mm) supplied with screws, nuts and expanding shell anchors, allowing jointmeter installation in Z direction.

### EXTENSION ROD OD313A15000

Stainless steel extension rod for installation of anchors 150 mm further apart.

### JUNCTION BOX OEPD000000


IP67 plastic junction box, available in different models to connect up to 10 crackmeters cables.

### 8 PAIRS MULTICORE CABLE OWE1160LSZH


Multicore cable (16 wires, 24 AWG) with LSZH M1 external jacket for grouping up to 4 vibrating wire jointmeters or 8 electrical jointmeters.

### 16 PAIRS MULTICORE CABLE OWE1320LSZH


Multicore cable (32 wires, 24 AWG) with LSZH M1 external jacket for grouping up to 4 vibrating wire jointmeters or 8 electrical jointmeters.

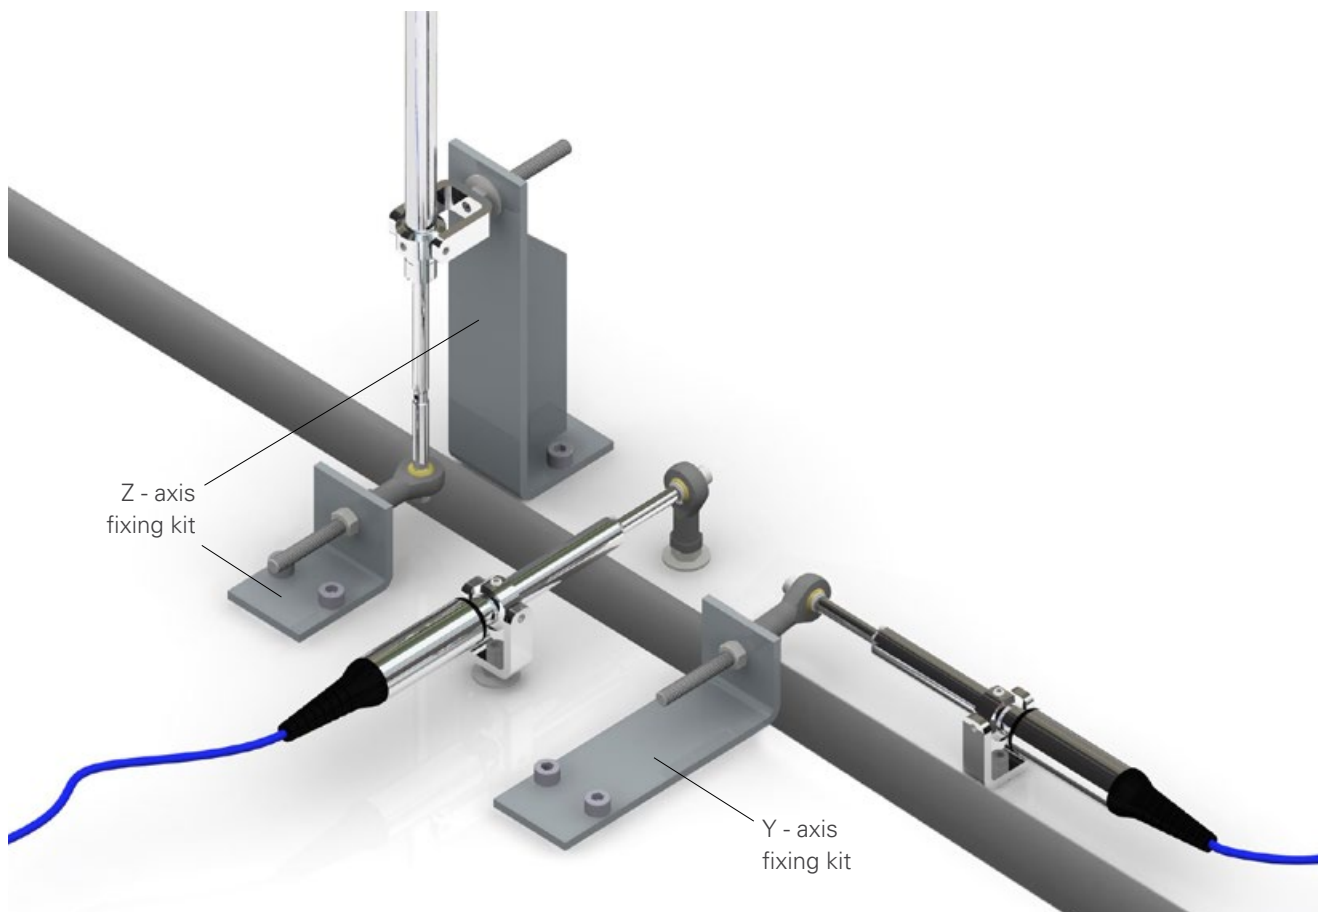




## ANALOGUE WIRELESS STRUCTURAL MONITORING

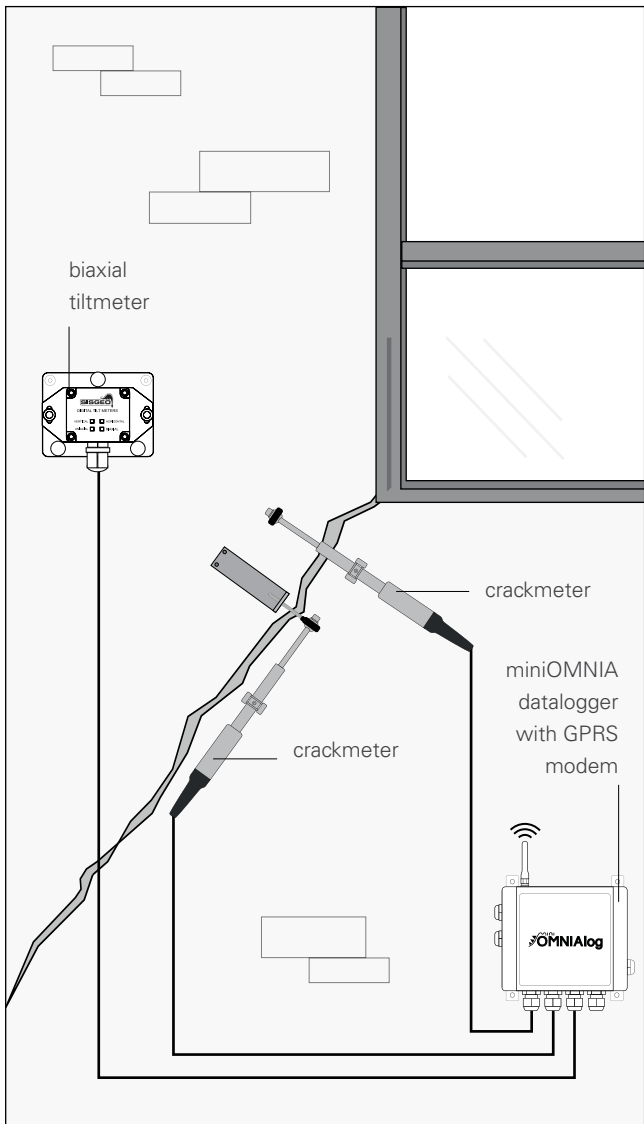

## EXAMPLE OF 3-D APPLICATION PILE BEARING DISPLACEMENT

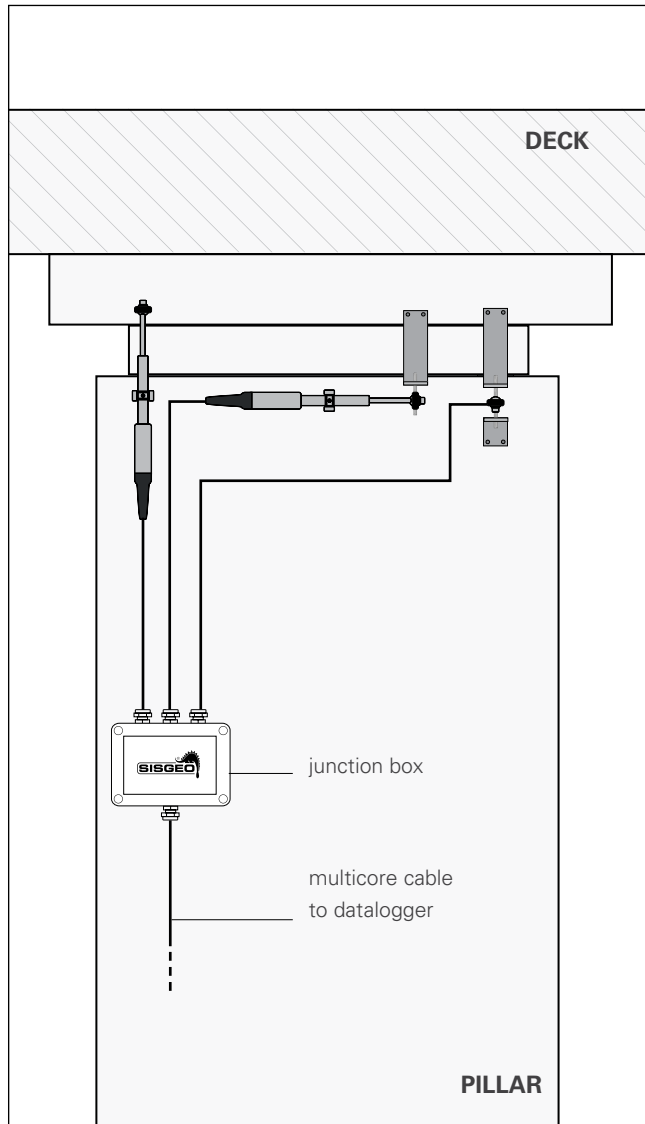

## READABLE BY



Refer to separate datasheets for further information.

All the information in this document is the property of Sisgeo S.r.l. and should not be used without permission from Sisgeo S.r.l. We reserve the right to change our products without prior notice. The datasheet is issued in English and other languages. In order to avoid discrepancies and disagreement on the interpretation of the meanings, Sisgeo Srl declares that English Language prevails.

### SISGEO S.R.L.

VIA F. SERPERO 4/F1  
20060 MASATE (MI) ITALY  
PHONE +39 02 95764130  
FAX +39 02 95762011  
INFO@SISGEO.COM

### TECHNICAL ASSISTANCE

SISGEO offers customers e-mail and phone assistance to ensure proper use of instruments and readout and to maximize performance of the system.

For more information, email us: [assistance@sisgeo.com](mailto:assistance@sisgeo.com)