

CONNECTIVITY

Thread X3

Broadband IIoT sensor connectivity

Thread X3 is the ideal complement to Loadsensing's solutions portfolio, geared towards customers who need broadband sensor connectivity for high-data rate, high-power, or high-speed industrial project scenarios. It is a fully autonomous sensor connectivity device with optional integrated 4G/LTE cellular modem, wireless mesh networking, and battery pack in a weather resistant enclosure. Each broadband device also serves as a gateway for wireless smart sensors.

**MULTIPLE MODES OF COMMUNICATION**
with prioritization and intelligent fail-over**WIRELESS MESH**

Extend sensor networks with resilient wireless mesh technology

**Wireless Gateway**

As a wireless gateway, the Thread X3 enables efficient connectionless low-power wide area (LPWA) wireless communication with compatible devices and smart sensors. The interface built on the MQTT-SN standard, provides scalable and secure wireless network management, security, and cloud connectivity.

Intelligent Wireless Networking

Automatic network role detection Gateway, Repeater, or Endpoint.

Adaptive and Resilient

Self-forming long-range wireless mesh networking.


**CELLULAR**

Deploy distributed devices connected to Cellular networks

Globally Compliant Cellular

Operate on 600+ cellular networks across 190 countries. No provisioning or carrier management required.



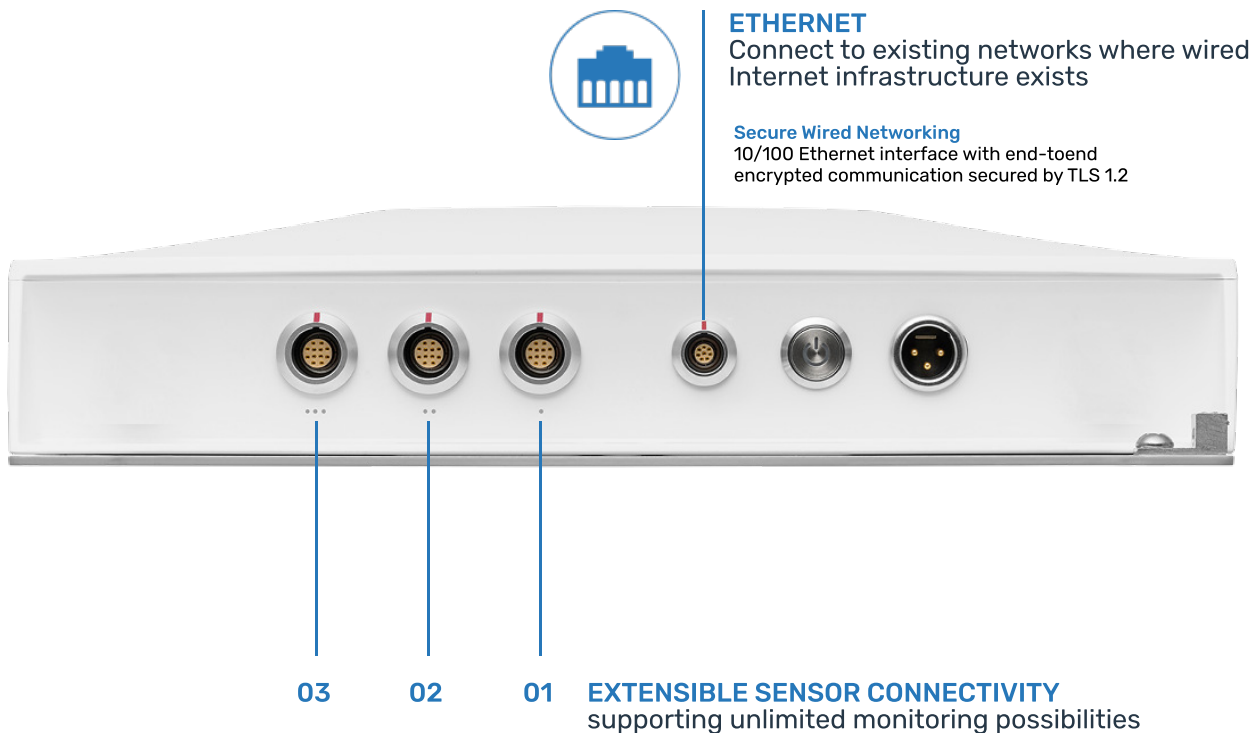

CONFIGURABLE SENSOR INTERFACES

Dense Sensor Installations

Cost-effectively manage nested sensors. Attach multiplexer (MUX) devices to support up to 128 sensors.

Relay Capabilities

Each device port can output 12V that can be toggled on and off manually, via API integration, by alert trigger, or by recorded flow (flowmeter connected). The 12V output can be used to control a relay (like a solid state relay) or to just provide direct power for a simple audio/visual alarm.

DIMENSIONS



TECHNICAL SPECIFICATIONS

MECHANICAL	
Dimensions:	14.76 in [37.49 cm] x 12.47 in [31.63 cm] x 3.39 in [8.61 cm]
Weight:	8.6 lbs (3900 grams)
IP-Rating:	66
Humidity:	5 to 95% non-condensing
Operating Temperature:	-40°F to 158°F (-40°C to 70°C)
Wireless Connector:	N-type female coaxial
Cellular Connector:	N-type female coaxial
Network Connector:	Lemo 8-pin
Sensor Connector:	Lemo 12-pin
GENERAL	
EMMC Flash Memory:	8 GB

MESH WIRELESS NETWORKING			
Mesh Wireless Frequency:	870 MHz	900 MHz LP	900 MHz HP
Mesh Wireless Range:	0.5 miles	3.5 miles	7.5 miles
Output Power:	25mW	250mW	1000mW
RF Data Rate (max):	80 kbps	250 kbps	250 kbps
POWER			
Input Voltage:	Nominal voltage 24 VDC, range 15-26 VDC		
Power Input:	Up to 2500mA (Charge mode) 200mA RMS (Standard mode) 20mA RMS (Low power mode) @24 VDC		
Direct Connect Solar Panel:	Maximum Peak Power (Pmax): 160 W Maximum open circuit voltage (Voc): 22.9 V Optimum operating voltage (Vmp): 20.2 V Maximum operating current (Imp): 7.92 A		
Battery	12.8V 9.9AH (126.72Wh) LiFePO4		

INTERNAL SENSORS	
System Temperature:	-40°F to 158°F (-40°C to 70°C), precision +/- 0.5°F
Barometer:	measurement range 0.26 bars - 1.26 bars, precision 0.00025 bars RMS

WIRED INTERFACES		
	Communication	Power
Network I/O:	10/100 Ethernet	None
Sensor I/O:	Interface 01: USB, RS232, RS485, 4-20mA Interface 02: RS232, RS485, 4-20mA Interface 03: RS232, RS485, 4-20mA	12 or 15VDC Out, up to 20 watts

CELLULAR NETWORKING			
	4G Bands	3G Bands	2G Bands
North America:	B2[1900], B4[1700], B5[850], B12[700], B13[700], B14[700], B66[1700], B71[600]	B2[1900], B4[1700], B5[850]	-
Europe:	B1[2100], B3[1800], B7[2600], B8[900], B20[800]	B1[2100], B8[900]	GSM900, DCS1800
Australia:	B1[2100], B3[1800], B5[850], B8[900], B9[1800], B18[850], B19[850], B26[850], B28[700]	B1[2100], B5[850], B6[800], B8 [900], B19[800]	GSM850/900, DCS1800, PCS1900
South America:		B1[2100], B2[1900], B4[1700], B5[850], B8[900]	-



COMPATIBILITY

MANUFACTURER	SENSOR NAME	SENSOR TYPE
Advantech	ADAM 4000 Series	Interface Module
Badger Meter	380 Series BTU Meter M2000 Flowmeter M5000 Flowmeter	BTU Meter Flowmeter Flowmeter
BeadedStream	M-Link Connection for Digital Temperature Cable Recite Connection for Digital Temperature Cable	Temperature Sonde Temperature Sonde
Call & Nicholas	Instruments SlideMinder	Linear Displacement
Campbell Scientific	AVW200 VW Analyzer Module LevelVUEB10 Bubbler Water Content Reflectometer	Interface Module Water level Reflectometer
DGSI	M-Logger for MEMS sensors MEMS Tiltmeter VW Mini-Logger VW V-Logger MEMS IPI EL Beam Sensor	Datalogger Tiltmeter Vibrating Wire datalogger Vibrating Wire datalogger In-place-inclinometer Tiltmeter
DYWIDAG (DSI)	DYNA Force	Elasto-Magnetic Sensor
Euromag International	MC608 Converter	Flowmeter
FloWav	PS1000 SDE	Flowmeter
Geosense	Smartmux Tilt Meter	Interface Module Tiltmeter
Geokon	8002 VW Data Logger	Vibrating Wire datalogger
Gill	Maximet	Weather Station
In-Situ	AquaTROLL 500 Data Logger AquaTROLL 200 Data Logger LevelTROLL Data Logger RuggedTROLL Data Logger	Water quality Water quality Water level Water level
Jewell Instruments	Lily Borehole Tiltmeter Tuff Tilt Tiltmeter	Tiltmeter Tiltmeter
Leica	GNSS System Total Stations Nivel Tiltmeter	GNSS Total Station Tiltmeter
Measurand	ShapeArray (Current Models) ShapeArray XYZ (Older Models)	Shape Array Shape Array



MANUFACTURER	SENSOR NAME	SENSOR TYPE
RocTest	RT-VLOG VW Logger RxTx Remote Reading Pendulum Station	Vibrating Wire Datalogger Pendulum
SLB (Schlumberger)	VDF (AC) Power Houses	Variable frequency drive
Schneider	ALTIVAR 630	Variable frequency drive
Seafloor Systems	Hydrolite Plus Single Frequency Hydrolite Plus Dual Frequency	Single Beam Sonar
Senix	ToughSonic Ultrasonic Distance Sensor	Distance sensor
Solinst	Solinst Levellogger 5	Water level
Somfy	Universal RTS Interface II (URTSI II-16 Channel)	Interface module
Topcon	GNSS AGM-1	GNSS
Turner Designs	C3 Submersible Fluorometer	Fluorometer
Vaisala	AQT530 Air Quality Monitoring Station WXT536 Weather Monitoring Station	Air quality monitor Weather station
YieldPoint	d-Exto Multiple Rod Extensometer d-MPBX Multiple Point Borehole Extensometer	Extensometer Extensometer
YSI	IQ SensorNet VisoTurb®	Turbidity probe



Variable Frequency Drives




Robotic Total Station


Deformation Sensing Arrays
(Up to 300 segments)


Imaging Devices


Multi-parameter
Weather Stations

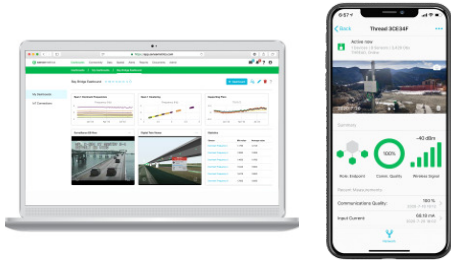CLOUD-BASED SOFTWARE

- Device configuration and management
- Sensor Integration Builder (SIB) and sensor driver library
- Data visualization and analytics
- Alerts
- Productivity Applications (reports, slope stability, remote sensing, environmental, groundwater management)

MOBILE APP

Commission sensor networks using only your phone. Scan the unique Thread QR code using your phone camera to easily add a Thread device to your account. Instantly access your data from any sensor, anywhere.

GENERAL DISCLAIMER:

Specifications are subject to change without notice and should not be construed as a commitment by Worldsensing. Worldsensing assumes no responsibility for any errors that may appear in this document. In no event shall Worldsensing be liable for incidental or consequential damages arising from the use of this document or the systems described in this document.

All content published or distributed by Worldsensing is made available for the purposes of general information. You are not permitted to publish our content or make any commercial use of our content without our express written consent. This material or any portion of this material may not be reproduced, duplicated, copied, sold, resold, edited, or modified without our express written consent.

v.20240228



www.worldsensing.com
connect@worldsensing.com

Barcelona
Viriat 47, Edificio Numancia 1, 10th floor,
08014 Barcelona, Spain
(+34) 93 418 05 85



United Kingdom



United States



Singapore



Poland